

G12
SERIES

12V BATTERY PLATFORM

Ever Growing Family

Ratchet Wrench
Impact Wrench
Impact Driver
Polisher
& more...

Brushless
Compact
Variable Speed
Powerful Torque
Versatile Application

ACDelco

acdelco-tools.com




Sign up newsletter to receive G12 battery discount | www.acdelco-tools.com

ACDelco

Distributed by Durofix Inc
909-980-3323
info@durofix.com
9168 Pittsburgh Ave, Rancho Cucamonga, CA 91730
www.acdelco-tools.com
shop.durofix.com



ACDelco, ACDelco Emblem and the ACDelco related graphics are General Motors Trademarks used under license to Mobiletron Electronics Co., Ltd.

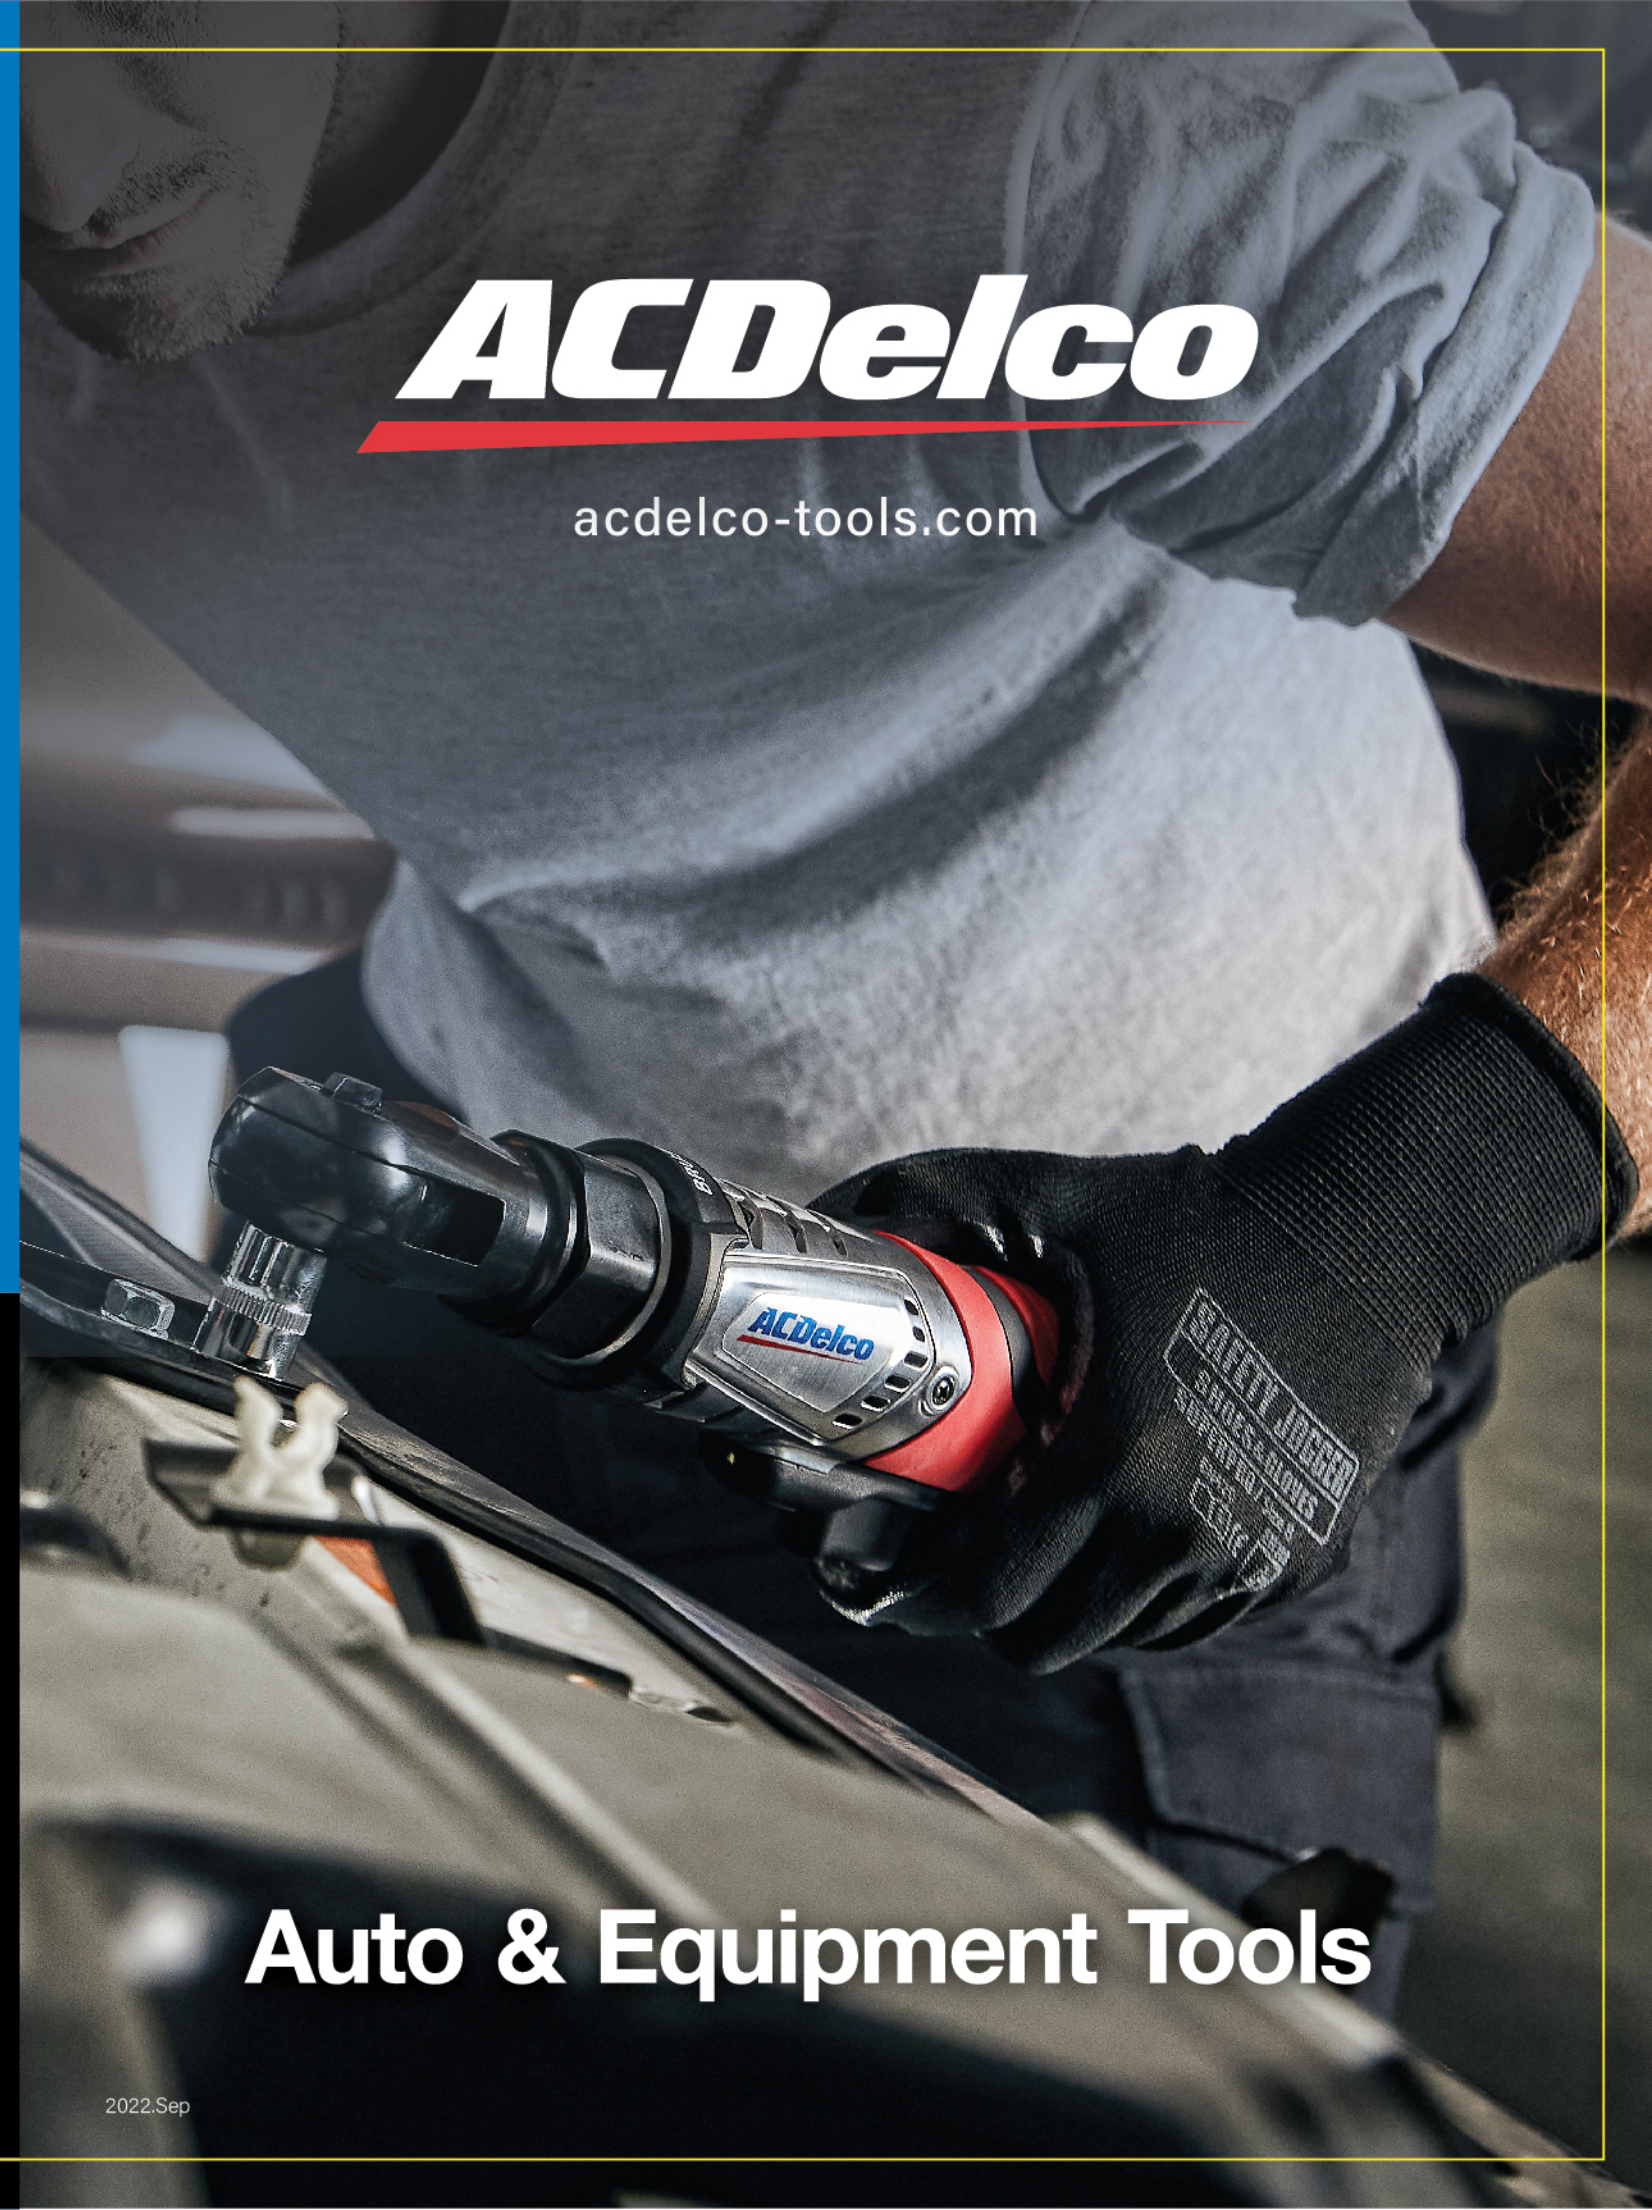


Auto & Equipment Tools

2022.Sep

G12
SERIES

- Compact & ergonomic design
- 12 Li-ion platform
- Ideal for extensive tools portfolio
- One battery for all

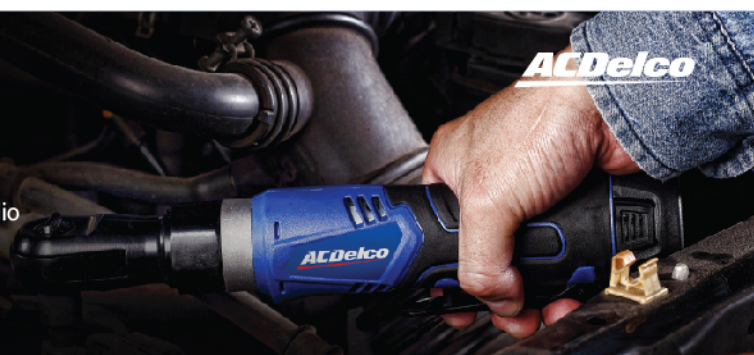

Cordless Ratchet Wrench



		BRUSHLESS			BRUSHLESS		BRUSHLESS
Model#	ARW1207	ARW1210-2	ARW1209	ARW1208	ARW1210-3	ARW1218-3	ARW1210-4
Drive Size	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	1/2"
Max. Torque	30 ft-lbs	45 ft-lbs	45 ft-lbs	55 ft-lbs	65 ft-lbs	40 ft-lbs	70 ft-lbs
No Load Speed	240 RPM	0-240 RPM	170 RPM	0-170 RPM	0-220 RPM	250 RPM	0-220 RPM

3/8" Impact Wrench	3/8" Impact Driver	3/8" 2-speed Drill / Driver
 ARI12104 - Drive Size 3.8" square - Max. Torque 90 ft-lbs / 120 Nm - No Load Speed 0-3100 RPM	 ARI12105 - Drive Size 1/4" hex shank - Max. Torque 82 ft-lbs / 110 Nm - No Load Speed 0-3100 RPM	 ARD12119 - Chuck Capacity 3/8" (10mm) - Max. Torque 265 in-lbs / 30 Nm - No Load Speed 0-350/0-1350 RPM
3" 2-speed Mini Polisher	Adjustable LED Flashlight	2.0 / 4.0 Ah Battery
 ARS1214 - Pad Diameter 3" / 75mm - No Load Speed 0-2600 RPM 0-7300 RPM	 ARL1238 - Brightness 8500 Lux - Tool Weight 0.37 lbs / 0.17 kg	 AB1225LA AB1225LA-2 *single cell detection design



Digital Torque Wrench



- Peak/trace modes enabled
- Precise and accurate
- Memory/buzzer alerts
- LED flashing alert
- Vibration alert

*features are model specific

Model#	ARM315-3A	ARM315-3i	ARM601-3	ARM303-3A	ARM317-4A	ARM329-4i	ARM601-4	ARM319-6A	ARM321-6A	ARM323-8A
Drive Size	3/8"	3/8"	3/8"	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"	1"
Calibration Mode	✓	✓		✓	✓	✓		✓	✓	✓
Angle Measurement	✓			✓	✓			✓	✓	✓
Interchangeable Head		✓				✓				
Torque Range (ft-lbs)	5 - 99.5	10 - 99.5	3.7 - 37	12.5 - 205.7	5 - 99.5	14.8 - 147.5	14.8 - 147.5	44.3 - 442.8	73.8 - 738	73.8-738
Length	17-1/16"	16-3/4"	12-3/8"	26-1/4"	17-7/8"	22"	17-5/16"	37"	48-5/8"	48-13/16"



Digital Torque Adapter



Model#	ARM602-3	ARM602-4	ARM602-4A
Drive Size	3/8"	1/2"	1/2"
Peak/Track Modes	✓	✓	✓
Accuracy	±2% CW, ±3% CCW*	±2% CW, ±3% CCW*	±1.5% CW, ±2.5% CCW*
Torque Range (ft-lbs)	5.9 - 59	14.8-147.6	25-250
Buzzer/LED Alert	✓	✓	✓

