

MOBILETRON™

REGITAR USA™



real TPMS for real car

Tire Pressure Monitoring System



M10503

■ **MOBILETRON ELECTRONICS CO.,LTD.**

85, Sec.4, Chung-Ching Rd. Ta-Ya District, Taichung City, Taiwan 428
Tel:+886-4-25607389 | Fax:+886-4-25673069 | E-mail:mobiletron@more.com.tw
<http://www.more.com.tw>

■ **REGITAR U.S.A. INC.**

2575 Container Drive, Montgomery AL 36109 U.S.A
Tel:+1-334-2441865 | Fax:+1-334-2441901 | E-mail:info@regitar.com
<http://www.regitar.com>


■ **DUROFIX INC.**

9168 Pittsburgh Ave. Rancho Cucamonga, CA 91730
Tel:+1-909-9803323 | Fax:+1-909-9808622 | E-mail:info@durofix.com

■ **MOBILETRON (UK) LTD.**

Unit 80 Roman Way, Roman Way Ind Est., Longridge Road, Preston, Lancashire, PR2 5BE, U.K.
Tel:+44-177-2693780 | Fax:+44-177-2693790 | E-mail:info@mobiletron.co.uk



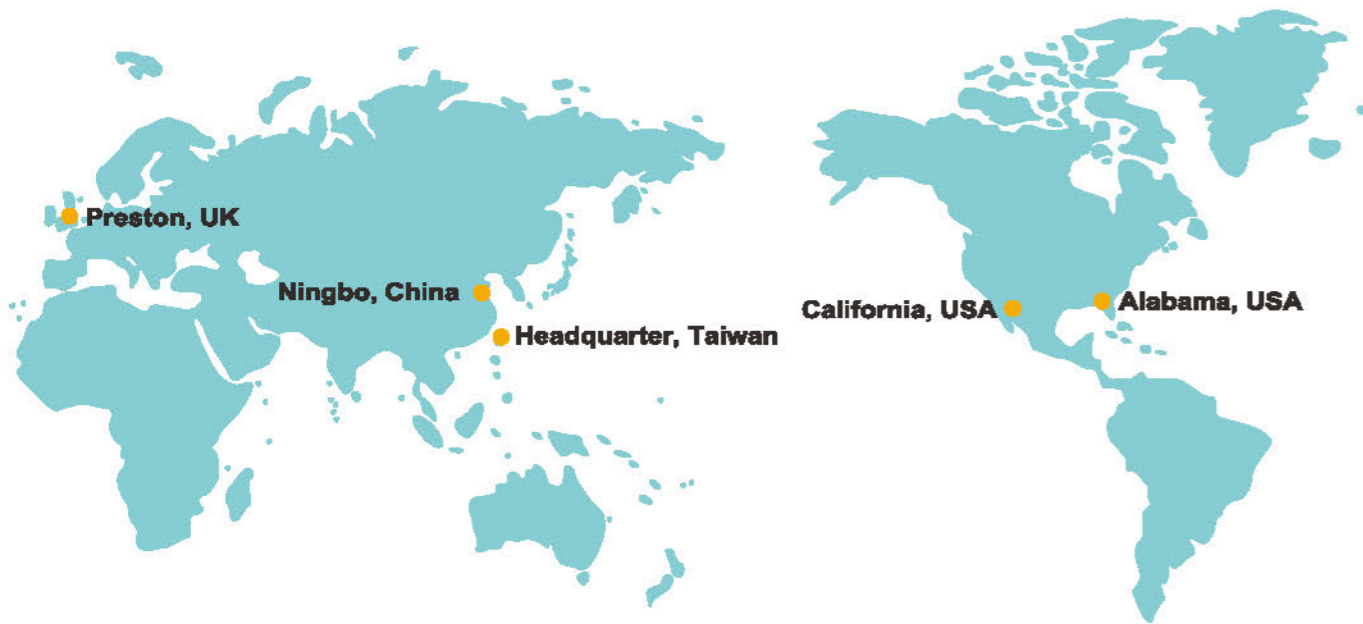

Innovate to Win MORE !



Through our global subsidiaries in USA, UK, China and Brazil, we provide you the prompt delivery and technical support.



Headquarter, Taiwan



Preston, UK




Alabama, USA



California, USA



Ningbo, China

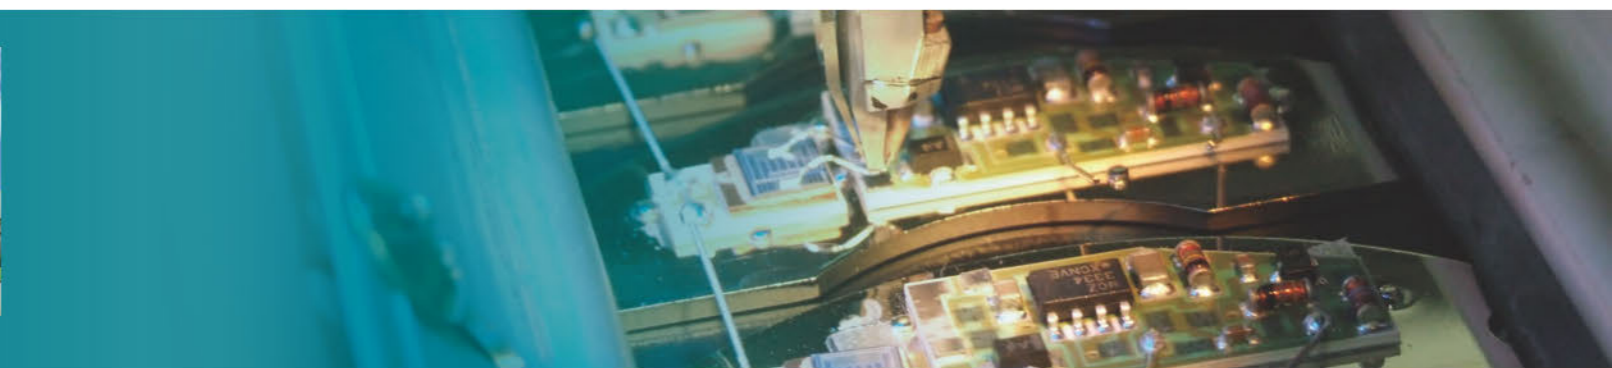

Your one-stop source for TPMS replacement parts!

- Complete coverage for various vehicles worldwide
- Compatible with all major TPMS scan tools
- Easy to fit, same process as OE products
- Two piece design with removable stem
- Fully automated process for production
- ISO/SAE/GB compliant




Discover for yourself the **MORESENSOR** advantages

- 2 sensors cover more than 90% coverage
- Easy to program with Mobiletron tool
- ID-clone function to save the time
- Follow OE relearn procedure
- 2 SKU save your storage cost
- ISO / SAE / GB compliant
- FCC / CE / KCC / NCC certified

TPMS OE SENSORS

ALL IN ONE SOLUTION

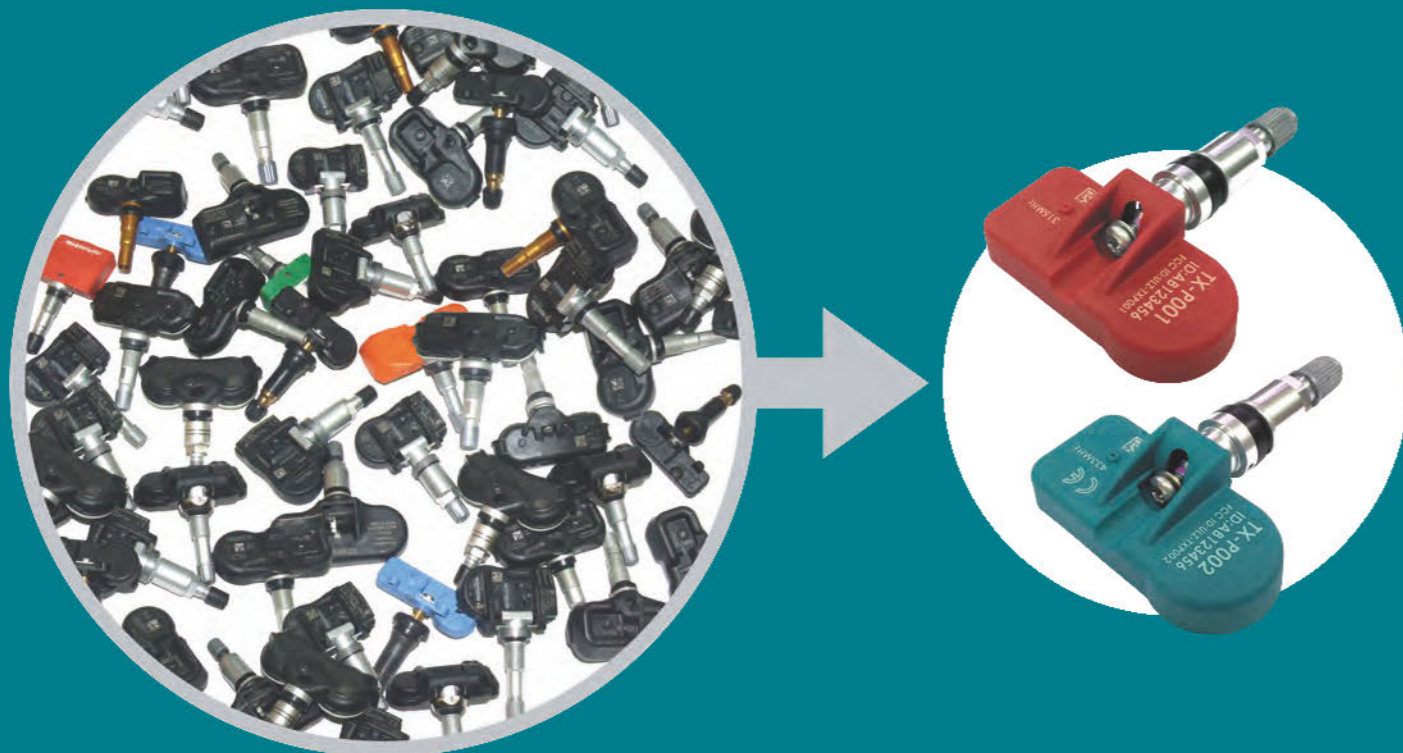

| Product View and Details | **MORESENSOR**



Sensor Type	Universal-Programmable
Sensor Part No.	TX-P001
Frequency	315 MHz
Valve	Clamp-in
Service Kit No.	41210030



Sensor Type	Universal-Programmable
Sensor Part No.	TX-P002
Frequency	433 MHz
Valve	Clamp-in
Service Kit No.	41210030



Sensor Type	Universal-Programmable
Sensor Part No.	TX-P003
Frequency	315 MHz
Valve	Snap-in
Service Kit No.	41210031



Sensor Type	Universal-Programmable
Sensor Part No.	TX-P004
Frequency	433 MHz
Valve	Snap-in
Service Kit No.	41210031

Programming Tool

| Futures |

- Contact programming design
- Few steps to program sensors
- Complete coverage in one tool



| Tool Layout |

• Front View



• Connectors



| Programming Process |

- Step 1. Select Vehicle
- Step 2. Create/Duplicate Sensor ID
- Step 3. Sensor Program





Direct-Fit TPMS Sensors

- Complete coverage for various vehicles worldwide
- Pre-programmed sensors, no sensor programming required
- Easy to fit, follow OE relearn procedures
- Compatible with all major TPMS scan tools
- ISO/SAE/GB compliant

• Web / Catalogue Information Support :

TecDoc
CERTIFIED DATA SUPPLIER

AUTOCAT+
MMI CERTIFIED DATA

Make	Year	Model	Part No.
ALFA ROMEO	2007	159 4C	159.4C.001
ALFA ROMEO	2007-2012	159 4C	159.4C.002
ALFA ROMEO	2007-2012	159 4C	159.4C.003
ALFA ROMEO	2007-2012	159 4C	159.4C.004
ALFA ROMEO	2007-2012	159 4C	159.4C.005
ALFA ROMEO	2007-2012	159 4C	159.4C.006
ALFA ROMEO	2007-2012	159 4C	159.4C.007
ALFA ROMEO	2007-2012	159 4C	159.4C.008
ALFA ROMEO	2007-2012	159 4C	159.4C.009
ALFA ROMEO	2007-2012	159 4C	159.4C.010



Sensor Type	Direct-Fit
Sensor Part No.	TX-S Series
Frequency	315 MHz
Valve	Clamp-in
Service Kit No.	20710376



Sensor Type	Direct-Fit
Sensor Part No.	TX-S Series
Frequency	433 MHz
Valve	Clamp-in
Service Kit No.	20710376

Model	Year	OE Sensor Reference	MOBILETRON RENTAH Part No.	Frequency	Sensor Turntable to Hub (mm)	Valve Turntable to Hub (mm)
ALFA ROMEO	2007-2012	159.4C.001	TX-S001	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.002	TX-S002	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.003	TX-S003	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.004	TX-S004	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.005	TX-S005	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.006	TX-S006	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.007	TX-S007	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.008	TX-S008	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.009	TX-S009	315 MHz	50 (2.0)	30 (1.2)
ALFA ROMEO	2007-2012	159.4C.010	TX-S010	315 MHz	50 (2.0)	30 (1.2)

(Note: This is a simplified representation of the extensive table provided in the image.)



Service Kits



Installation procedures

- Dismount tire and sensor from the wheel.
- Clear valve stem hole in rim of any corrosion or dirt.
- Remove washer, nut and cap from the valve stem.
- Push the valve stem thru the rim, install the washer and nut, then tighten the nut to 36 in-lb (4 N.m).
- Hold the sensor body against the rim and then tighten the screw to 20 in-lb (2.2 N.m).
- Follow up the same re-learn procedures instructed by car makers

Part No.	41210030
Application	Universal Sensor
Valve Length	51.2 mm
Nut Torque	36 in-lb (4 N.m)
Screw Torque	20 in-lb (2.2 N.m)

Part No.	20710376
Application	Direct-Fit Sensor
Valve Length	50.0 mm
Nut Torque	36 in-lb (4 N.m)
Screw Torque	20 in-lb (2.2 N.m)

